



# GreenPerformance Troffer

## SM100C LED54S 840 W60L120 PSU G3

Variable linear-lens array in polycarbonate cover

GreenPerform Troffer improves the compact design of the last generation with performance improvement and more variants for different markets. Integrates with all available systems: POE, InterAct office wireless, InterAct Office Pro, ActiLume controller. GreenPerform Troffer offers additional energy saving and connected features.

### Product data

General Information	
Lamp colour code	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Optical cover/lens type	VAR-PC [ Variable linear-lens array in polycarbonate cover]
Control interface	-
Protection class IEC	Safety class I (I)
Glow-wire test	60030 [ Temperature 600 °C, duration 30 s]
Flammability mark	F [ For mounting on normally flammable surfaces]
CE mark	CE mark
Warranty period	3 years
Constant light output	No
Number of products on MCB (16 A type B)	24

Light source engine type	LED
Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	3 A
Inrush time	62 ms
Power factor (min.)	0.9
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Metal
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel

## GreenPerformance Troffer

Optical cover/lens finish	Ribbed
Overall length	1197 mm
Overall width	597 mm
Overall height	56 mm
Colour	White

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	5400 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	123 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	80
Initial chromaticity	SDCM<4
Initial input power	44 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
---------------------------	---------

### Application Conditions


Ambient temperature range	-20 to +40 °C
Suitable for random switching	No

### Product Data

Full product code	911401519651
Order product name	SM100C LED54S 840 W60L120 PSU G3
Order code	911401519651
SAP numerator – quantity per pack	1
Numerator – packs per outer box	2
SAP material	911401519651
SAP net weight (piece)	8.600 kg



## Dimensional drawing

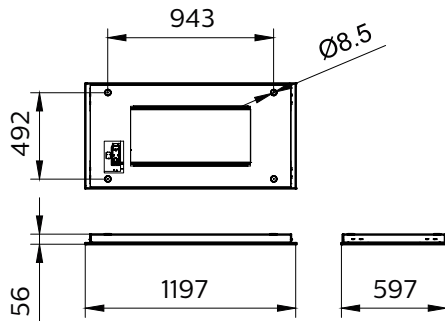

RC100B GreenPerform Troffer

