



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL 8W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

| General Information              |              | Voltage (Nom)                     |                                 |
|----------------------------------|--------------|-----------------------------------|---------------------------------|
| Cap base                         | G5 [ G5]     | 56 V                              |                                 |
| Main application                 | Insect traps | Approval and Application          |                                 |
| Life to 50% failures (nom.)      | 10000 h      | Mercury (Hg) content (nom.)       | 4.4 mg                          |
| Useful life (nom.)               | 5000 h       | UV                                |                                 |
| Light Technical                  |              | UV-B/UV-A (IEC)                   | 0.2 %                           |
| Colour Code                      | 10           | UV-A radiation 100 hours (IEC)    | 1.60 W                          |
| Colour Designation               | Actinic      | Product Data                      |                                 |
| Chromaticity coordinate X (nom.) | 222          | Full product code                 | 871150026042027                 |
| Chromaticity coordinate Y (nom.) | 210          | Order product name                | Actinic BL TL 8W/10 1FM/10X25CC |
| Depreciation at 500 Hours        | 17 %         | EAN/UPC – product                 | 8711500260420                   |
| UV depreciation at 1,000 h       | 25 %         | Order code                        | 928001001030                    |
| UV Depreciation at 2,000 h       | 35 %         | SAP numerator – quantity per pack | 1                               |
| Operating and Electrical         |              | Numerator – packs per outer box   | 250                             |
| Power (Rated) (Nom)              | 7.1 W        | SAP material                      | 928001001030                    |
| Lamp current (nom.)              | 0.145 A      | SAP net weight (piece)            | 25.300 g                        |

# Actinic BL TL(-K)/TL-D(-K)


## Dimensional drawing




| Product                             | D (max) | A (max)  | B (max)  | B (min) | C (max)  |
|-------------------------------------|---------|----------|----------|---------|----------|
| Actinic BL TL 8W/10 1FM/<br>10X25CC | 16 mm   | 288.3 mm | 295.4 mm | 293 mm  | 302.5 mm |

TL 8W/10

## Photometric data

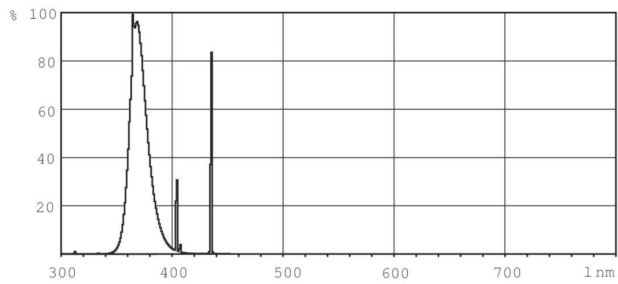

Lightcolour /10

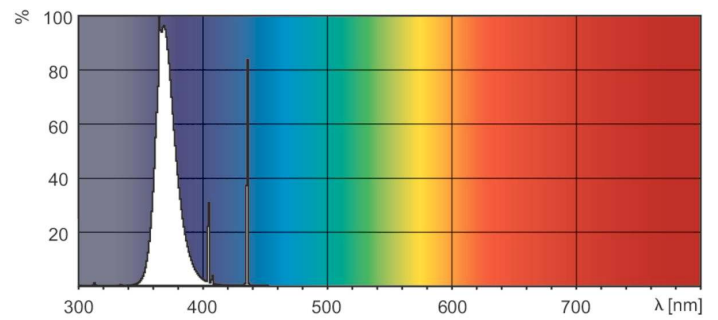

Lightcolour /10

