



# TL-D Standard Colours

## TL-D 10W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Controls and Dimming	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 50% failures (nom.)	5000 h		
Light Technical		Mechanical and Housing	
Colour Code	33-640	Bulb shape	T8 [ 26 mm (T8)]
Lamp Luminous Flux 25°C EL (Nom)	440 lm		
Colour Designation	Cool White (CW)	Approval and Application	
Lumen maintenance 2,000 hours (nom.)	85 %	Mercury (Hg) content (nom.)	8.0 mg
Lumen maintenance 5,000 hours (nom.)	80 %		
Colour Temperature, horizontal (Nom)	4100 K	Product Data	
Colour Rendering Index,horiz (Nom)	60	Full product code	871150064128100
Operating and Electrical		Order product name	TL-D 10W/33-640 1SL/25
Power (Rated) (Nom)	10 W	EAN/UPC – product	8711500641281
Lamp current (nom.)	0.230 A	Order code	928024003331
Voltage (Nom)	46 V	SAP numerator – quantity per pack	1
		Numerator – packs per outer box	25
		SAP material	928024003331
		SAP net weight (piece)	0.045 kg
		ILCOS code	FD-10/41/2B-E-G13

# TL-D Standard Colours


## Dimensional drawing

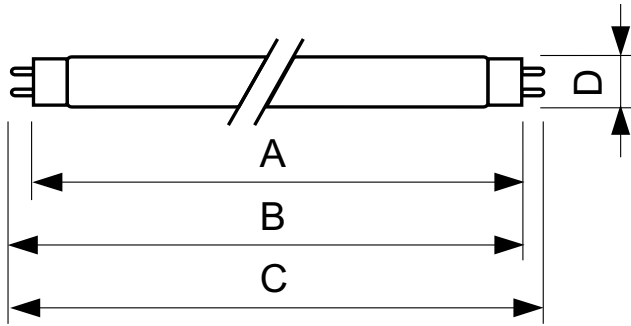

TL-D 10W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 10W/33-640 1SL/25	28 mm	331.5 mm	338.6 mm	336.2 mm	345.7 mm


## Photometric data

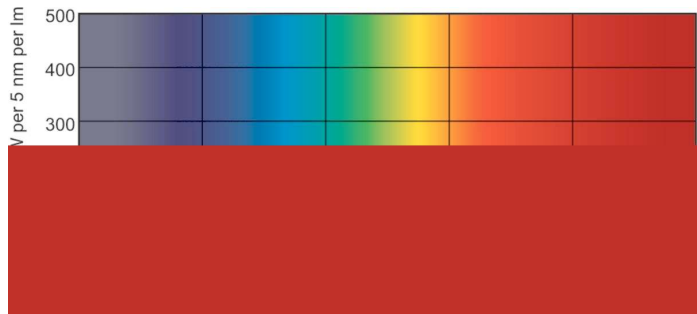


Lightcolour /33-640

Lightcolour /33-640

## Lifetime

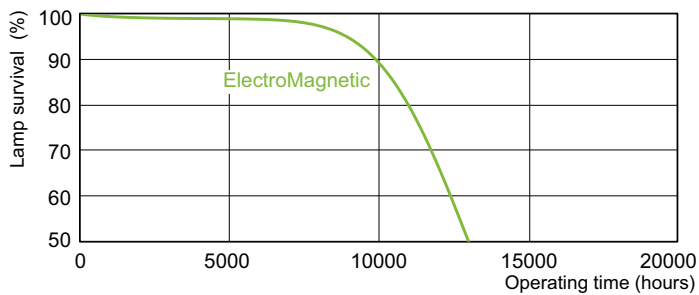

LDLE\_TL-DSTD\_0001-Life expectancy diagram

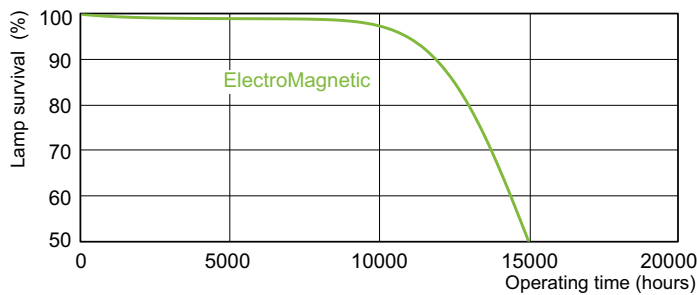

LDLE\_TL-DSTD\_0002-Life expectancy diagram

## TL-D Standard Colours

### Lifetime



LDLM\_TL-DSTD\_0001-Lumen maintenance diagram

