



Actinic BL TL-D(K) Secura

Actinic BL TL-D 18W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		UV depreciation at 5000 hours	
Cap base	G13 [Medium Bi-Pin Fluorescent]		30 %
Main application	Insect traps	Operating and Electrical	
Life to 50% failures (nom.)	13000 h	Power (Rated) (Nom)	18 W
Useful life (nom.)	9000 h	Lamp current (nom.)	0.36 A
Light Technical		Voltage (Nom)	59 V
Colour Code	10	Mechanical and Housing	
Colour Designation	Actinic	Bulb shape	T26 [T 26mm]
Chromaticity coordinate X (nom.)	220		
Chromaticity coordinate Y (nom.)	200		
UV Depreciation at 2,000 h	20 %		

Actinic BL TL-D(K) Secura

Approval and Application

Mercury (Hg) content (nom.) 5.0 mg

UV

UV-B/UV-A (IEC) 0.2 %

UV-A radiation 100 hours (IEC) 4.5 W

Product Data

Full product code 872790085383400

Order product name Actinic BL TL-D 18W/10 Secura 1SL/25

EAN/UPC – product 8727900853834

Order code 928048201003


SAP numerator – quantity per pack 1

Numerator – packs per outer box 25

SAP material 928048201003

SAP net weight (piece) 127.500 g



Dimensional drawing

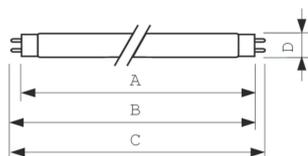

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 18W/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
Secura 1SL/25					

TL-D 18W/10 SECU

Photometric data

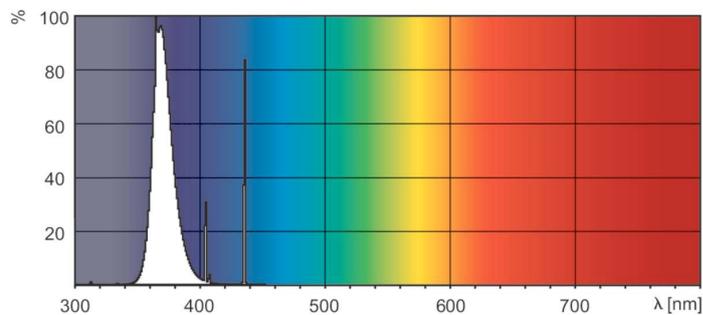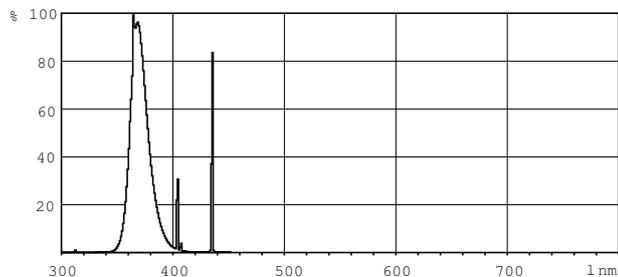

Lightcolour /10

Lightcolour /10

