



MASTER LEDspot LV

MASTER LED 4-35W 2700K MR16 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information			
Cap base	GU5.3 [GU5.3]	Luminous intensity (nom.)	550 cd
EU RoHS compliant	Yes	Colour Designation	Warm white (WW)
Nominal lifetime (nom.)	25000 h	Colour Temperature, horizontal (Nom)	2700 K
Switching cycle	50,000X	Lamp Luminous Efficacy EM (Nom)	65.00 lm/W
Technical type	4-35W	Colour consistency	<6
		Colour Rendering Index,horiz (Nom)	80
		LLMF at end of nominal lifetime (nom.)	70 %
		Luminous flux in 90° cone (rated)	220 lm
Light Technical		Operating and Electrical	
Colour Code	827 [CCT of 2,700 K]	Input frequency	- Hz
Technical Beam Angle (Nom)	36 °		
Lamp Luminous Flux 25°C EL (Nom)	240 lm		

MASTER LEDspot LV

Power (Rated) (Nom)	4 W
Lamp current (nom.)	520 mA
Wattage equivalent	20 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	instant full light
Power factor (nom.)	0.7
Voltage (Nom)	12 V

Temperature

T-Case maximum (nom.)	65 °C
-----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb shape	MR16 [2inch/50mm]
------------	--------------------


Approval and Application

Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	4 kWh

Product Data

Full product code	871869647621500
Order product name	MASTER LED 4-35W 2700K MR16 36D
EAN/UPC – product	8718696476215
Order code	929001147508
Local order code	LED4WMR16WW36D
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929001147508
SAP net weight (piece)	0.035 kg


Dimensional drawing




LED VLE 3.4-20W GU5.3 827 MR16 36D

Product	D	C
MASTER LED 4-35W 2700K MR16 36D	50 mm	49 mm

Photometric data



SDLD_LEDspotL_0114-Light distribution diagram

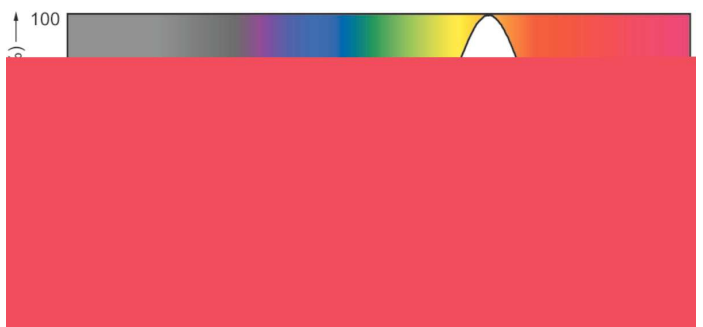

MASTER LEDspot LV

