



GreenPerform Waterproof G3

WT198C LED57S/840 PSU PCO L1500

Power supply unit - - - - 135°

GreenPerform Waterproof G3 provides excellent optics with reliable performance, easy installation and maintenance

Product data

General Information	
Beam angle of light source	120 °
Lamp colour code	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSU [Power supply unit]
Driver included	Yes
Optic type	No [-]
Optical cover/lens type	No [-]
Luminaire light beam spread	135°
Control interface	-
Connection	No [-]
Cable	-
Protection class IEC	Safety class I (I)
Glow-wire test	850/30 [Temperature 850 °C, duration 30 s]
Flammability mark	NO [-]
CE mark	CE mark
ENEC mark	-
Constant light output	No
Number of products on MCB (16 A type B)	24

EU RoHS compliant	No
LED engine type	LED

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	5,56 A
Inrush time	47 ms
Power factor (min.)	0,9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate

GreenPerform Waterproof G3

Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall length	1515 mm
Overall width	80 mm
Overall height	85 mm
Overall diameter	80 mm
Colour	Grey

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]

Initial Performance (IEC Compliant)

Initial luminous flux	5700 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	130 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	(0.38,0.38)
Initial input power	42.7 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
Median useful life L80B50	42000 h
Median useful life L90B50	20000 h

Application Conditions


Ambient temperature range	-25 to +40 °C
Maximum dimming level	Not applicable

Product Data

Full product code	911401826480
Order product name	WT198C LED57S/840 PSU PCO L1500
Order code	911401826480
SAP numerator – quantity per pack	1
Numerator – packs per outer box	9
Material no. (12 NC)	911401826480
SAP net weight (piece)	1.700 kg



Dimensional drawing

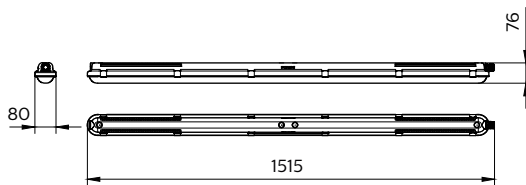

WT188C/WL020C

