



# CoreLine Wall-mounted

## WL131V LED34S/840 PSU WH

LED Module, system flux 3400 lm - 840 neutral white - Power supply unit - White

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Wall-mounted range of LED products can be used to replace traditional wall-mounted luminaires incorporating compact fluorescent lamps. The process of selecting, installing and maintaining is so easy – it's a simple switch.

### Product data

General Information		Glow-wire test	
Lamp family code	LED34S [ LED Module, system flux 3400 lm]	Flammability mark	650/30 [ Temperature 650 °C, duration 30 s]
Beam angle of light source	120 °	CE mark	NO [ -]
Lamp colour code	840 neutral white	ENEC mark	CE mark
Light source replaceable	No	Warranty period	ENEC mark
Number of gear units	1 unit	Remarks	5 years
Driver/power unit/transformer	PSU [ Power supply unit]		*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.
Driver included	Yes	Constant light output	No
Optic type	Opal prismatic reflector	Number of products on MCB (16 A type B)	32
Optical cover/lens type	OP [ Opal bowl with painted cover]		
Luminaire light beam spread	120°		
Control interface	-		
Connection	PI [ Push-in connector 3-pole]		
Cable	-		
Protection class IEC	Safety class II (II)		

## CoreLine Wall-mounted

EU RoHS compliant	Yes
-------------------	-----

### Operating and Electrical

Input Voltage	220-240 V
Input frequency	50 to 60 Hz
Control signal voltage	-
Initial CLO power consumption	NA W
Average CLO power consumption	NA W
End CLO power consumption	NA W
Inrush current	13.5 A
Inrush time	1.75 ms
Power factor (min.)	0.9

### Controls and Dimming

Dimmable	No
----------	----

### Mechanical and Housing

Housing material	Polyamide
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Opal
Overall length	480 mm
Overall width	480 mm
Overall height	70 mm
Overall diameter	480 mm
Colour	White
Dimensions (height x width x depth)	70 x 480 x 480 mm (2.8 x 18.9 x 18.9 in)

### Approval and Application

Ingress protection code	IP65 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [ 5 J vandal-protected]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3400 lm
-------------------------------------	---------

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	95 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	80
Initial chromaticity	(0.39, 0.39) SDCM<3
Initial input power	36 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L70

### Application Conditions


Ambient temperature range	-20 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	Not applicable
Suitable for random switching	Yes

### Product Data

Full product code	871869938785399
Order product name	WL131V LED34S/840 PSU WH
EAN/UPC – product	8718699387853
Order code	912401483189
Local code	WL131LED34840
SAP numerator – quantity per pack	1
Numerator – packs per outer box	6
Material no. (12 NC)	912401483189
SAP net weight (piece)	3.050 kg





## Dimensional drawing



CoreLine Wall-mounted WL130V/WL131V

# CoreLine Wall-mounted

## Photometric data

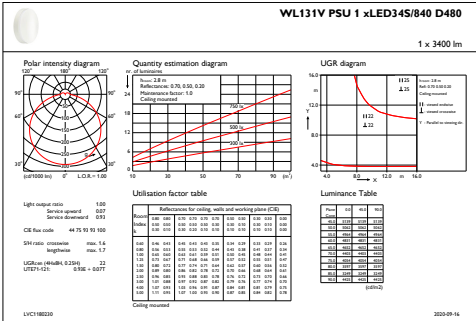

IFGU1\_WL131VPSU1xLED34S840D480

OFPC1\_WL131VPSU1xLED34S840D480

