



MASTER TL-D Super 80

TL-D 18W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Voltage (Nom)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	59 V	
Life to 10% failures (nom.)	10000 h	Controls and Dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Life to 50% failures preheat (nom.)	20000 h	Mechanical and Housing	
Light Technical		Cap-base information	Green [Green Cap]
Colour Code	840 [CCT of 4,000 K]	Approval and Application	
Lamp Luminous Flux (Nom)	1350 lm	Energy efficiency label (EEL)	A
Colour Designation	Cool White (CW)	Mercury (Hg) content (nom.)	2.0 mg
Lumen maintenance 2,000 hours (nom.)	96 %	Product Data	
Lumen maintenance 5,000 hours (nom.)	94 %	Full product code	871829125414000
Colour Temperature, horizontal (Nom)	4000 K	Order product name	TL-D 18W/840 1SL/25
Lamp Luminous Efficacy EM (Nom)	75 lm/W	EAN/UPC – product	8718291254140
Colour Rendering Index, horiz (Nom)	82	Order code	927981184024
Operating and Electrical		SAP numerator – quantity per pack	1
Power (Rated) (Nom)	18 W	Numerator – packs per outer box	25
Lamp current (nom.)	0.360 A		

MASTER TL-D Super 80



SAP material	927981184024
SAP net weight (piece)	0.070 kg

Dimensional drawing

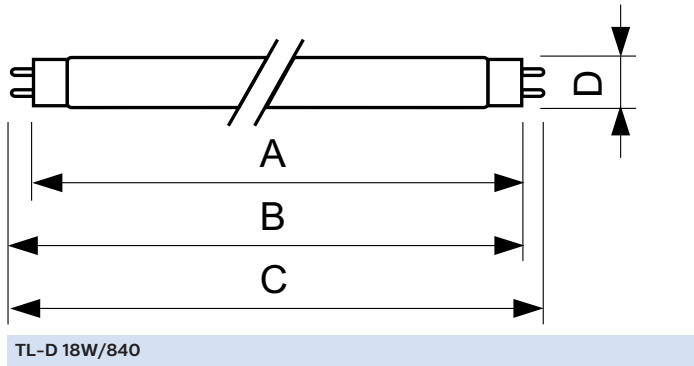


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Lifetime

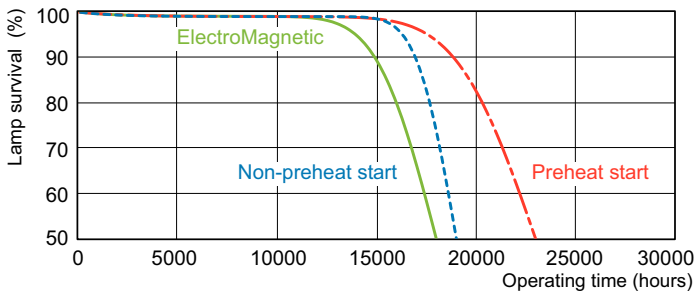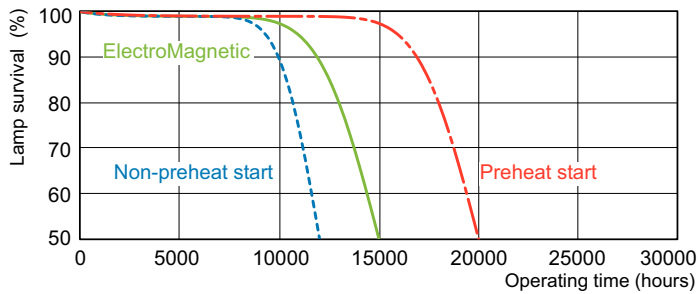

LDLE_TL-D8G_0001-Life expectancy diagram

LDLE_TL-D8G_0002-Life expectancy diagram

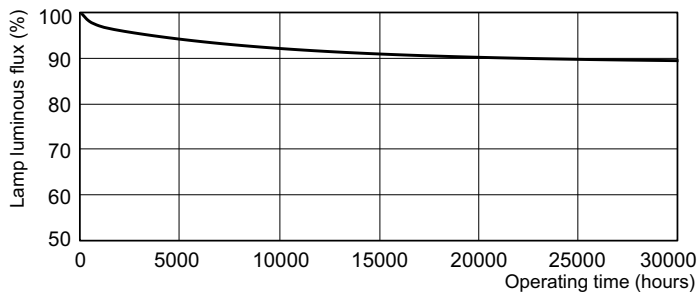

LDLM_TL-D8G_0001-Lumen maintenance diagram

MASTER TL-D Super 80

